

AVAILABLE IN 2015

M4.56

● ● ● ● 38.3 KW / 52 HP



TECHNICAL SPECIFICATIONS

This engine is available in 2015.




Supplied as standard with instrument panel type MP22BS12A, four flexible engine mountings type KSTEUN80V, and an oil sump pump.

All VETUS engines are certified according ISO 8178-1



| | |
|----------------------------------|---|
| * Max. output at flywheel | 38.3 kW (52 hp) |
| * Max. output at propeller shaft | 37.1 kW (51 hp) |
| Maximum rpm | 3000 |
| Max. torque | 127 Nm/2000 rpm |
| Bore x stroke | 78 mm x 92 mm |
| Displacement | 1758 cm ³ |
| Number of cylinders | 4 in line |
| Combustion system | indirect injection |
| Compression ratio | 22:1 |
| Firing order | 1-3-4-2 |
| Intake | Turbo charged |
| Electrical system | 12 Volt - 110 Amps. |
| Cooling system (standard) | indirect cooling (keel cooling optional) |
| Gearbox, standard | TM345(A) (2/2.47:1) |
| Gearbox options | ZF12M 2.14:1 ZF15MIV 2.13/2.99:1 TMC60P 2/2.5:1 |

| | |
|---|--|
| Saildrive | SP60 2,15/2,38:1 SD10 2,23/2,49:1 |
| Dry weight (incl. std. gearbox) | 206 kg |
| Fuel consumption at 1800 rpm | 244 g/kW.h (179 g/hp.h) |
| Max. backwards installation angle | 15° |
| Max. lateral inclination angle; Continuously | 25° |
| 5 minutes max. | 30° |
| Suction height of fuel lift pump | 1.5 m |
| Calorifier connection kit | optional |
| Instrument panel (standard) | MP22BS12A |
| Warning lights and audible alarm | oil pressure, temperature (coolant and exhaust), charging current |
| Control light for | pre-heating |
| Electric circuit protection | fuse 10 Amps. |
| Certifications | EU-RCD, SOLAS |

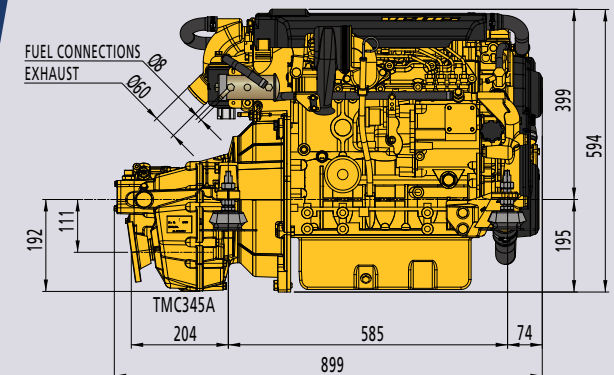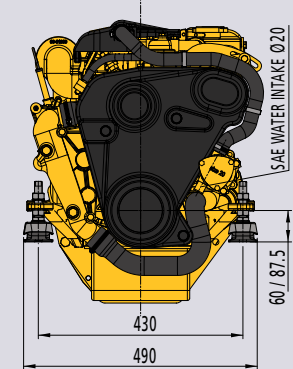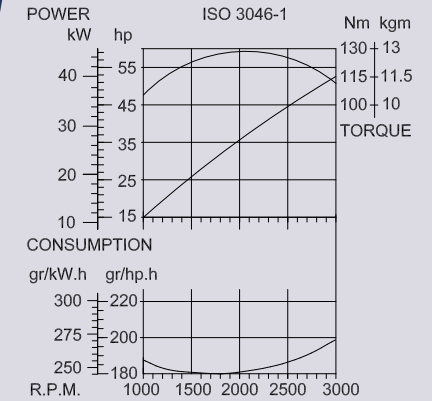

* In accordance with ISO 8665 and ISO 3046-1